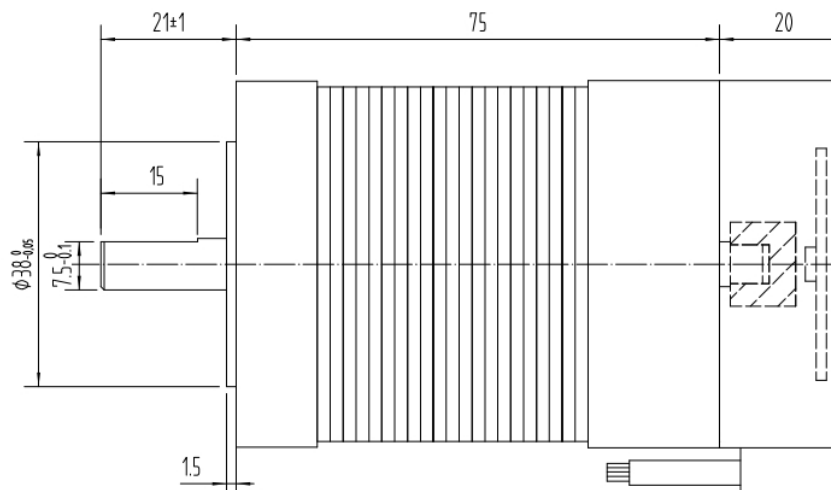
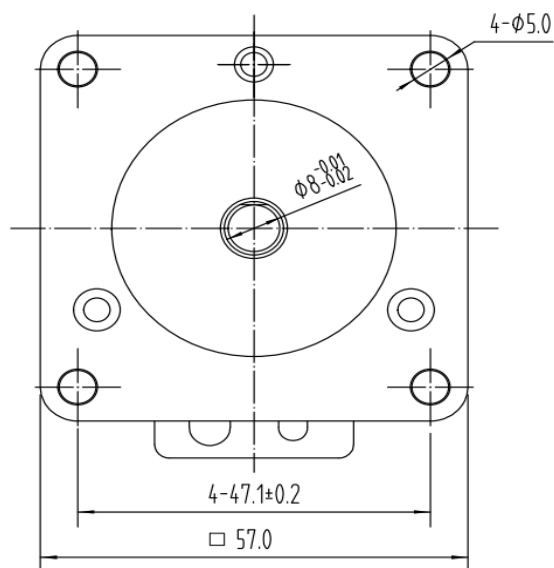



Electrical Spec:

Model		
ITEM	UNIT	SPEC
PHASE	PHS	3
VOLTAGE	VDC	24
ROTOR POLE	POLES	4
RESISTANCE @25°C	Ω	1.15±10%
INDUCTANCE	mH	2.1±20%
NOLOAD SPEED	RPM	4800REF
NOLOAD CURRENT	A	0.3REF
RATED SPEED	RPM	4000
RATED POWER	W	70
RATED TORQUE	N.m	0.135
RATED CURRENT	A	4
INSULATING STRENGTH	VAC	500
IP CLASS		IP40
INSULATION CLASS		B

编码器类型：单圈绝对值通讯式磁编

编码器分辨率：14位

编码器线连接器



端子型号	三排15针 DB15 公头															
针号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	外壳
定义	NC	NC	0V	NC	NC	VB-	NC	NC	NC	VB+	NC	NC	5V	SD+	SD-	屏蔽
颜色			黑			棕黑				棕			红	蓝	蓝黑	

电机型号：57ST70P2L05V1